



OSNT

The BRITEX Neutralizing Tank is constructed from robust 1.6mm Grade 316 stainless steel, offering exceptional durability and corrosion resistance.

Features and Benefits

- **Custom Solution** – Tailored design ensures optimal performance and compatibility with your setup.
- **Grade 316 Stainless Steel** - Superior corrosion resistance and longevity, ideal for harsh environments.
- **High-quality Components** - Enhances durability and reduces long-term maintenance costs.
- **Quick-release Lid with Gasket Seal** - Provides secure sealing and easy access for cleaning or inspection.

Sample Spec

BRITEX grade 316 S.S. Neutralizing Tank - 724L x 404W x 512H O/A. 102 Litre capacity. 3 x 20mm wide baffles. Lid to incorporate airtight sealing gasket and be secured with quick release clips - Product Code OSNT


*RED TEXT may denote a variable where one option only is to be selected, a Nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: Neutralizing Tank


Sample Specification Code

$\frac{A}{\text{OSNT}}$
= Neutralizing Tank


MODEL OSNT Section

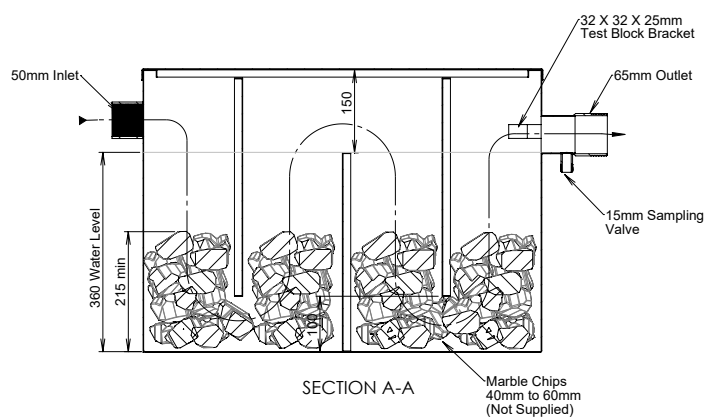


MODEL OSNT Side Elevation

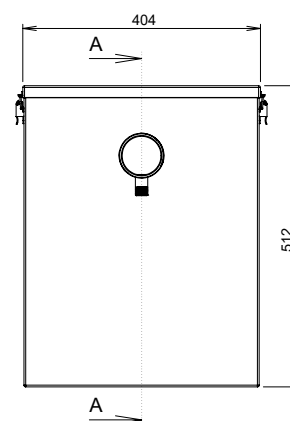

MODEL OSNT Plan Elevation

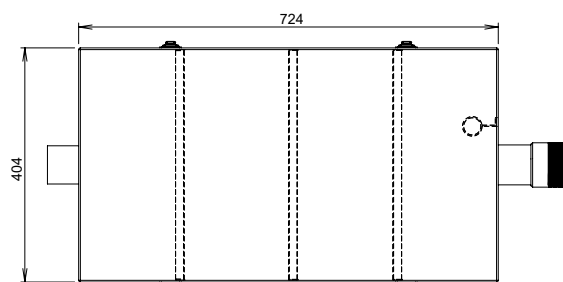

MODEL OSNT Iso

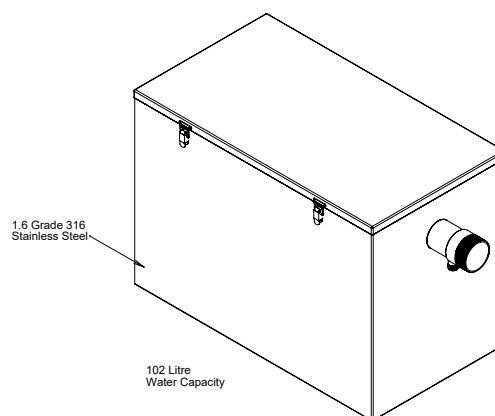

Add ons

- Custom capacity and dimensions

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 05 Sep 2025 | Rev 2