



Lead Free
AS3718
WM 020302



TW-9103

The BRITEX Accessible Timed Flow Lever Tap is designed for use with BRITEX Accessible Hand Basins, meeting AS 1428 requirements when installed correctly (left or right tap hole only). With easy lever activation, hygienic no-touch auto shut-off and water-saving performance, it is ideal for public amenities and accessible applications.

Features and Benefits

- **Easy Lever Activation** – Smooth, easy-to-use lever design that supports effortless operation for all users.
- **Hygienic Auto Shut-Off** – No-touch timed shut-off prevents taps being left running and reduces water wastage.
- **Vandal Resistant Design** – Robust chrome-plated solid brass construction for long-term performance in public settings.
- **7 Second Time Flow** – Consistent timed delivery designed for efficient water use and reduce waste.

Sample Spec

Britex Timed Flow Lever Pillar Tap - Product Code: TW-9103


*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

Technical Information: Timed Flow Lever Pillar Tap

WELS: 6 Star Rating (4.5L/min)
Nominal Flow Rate (LPM): 4.5
WaterMark: AS 3718 Lic. WM 020302
Inlet: 1/2" BSP (15mm) MI
Valve Type: Time Flow

Max. Recommended Temperature (°C): 45
Max. Working Temperature (°C): 70
Max. Static Pressure (kPa): 1000
Max. Recommended Pressure (kPa): 250 Min - 300 Max
Finish: Chrome

MODEL TW-9103 Side Elevation

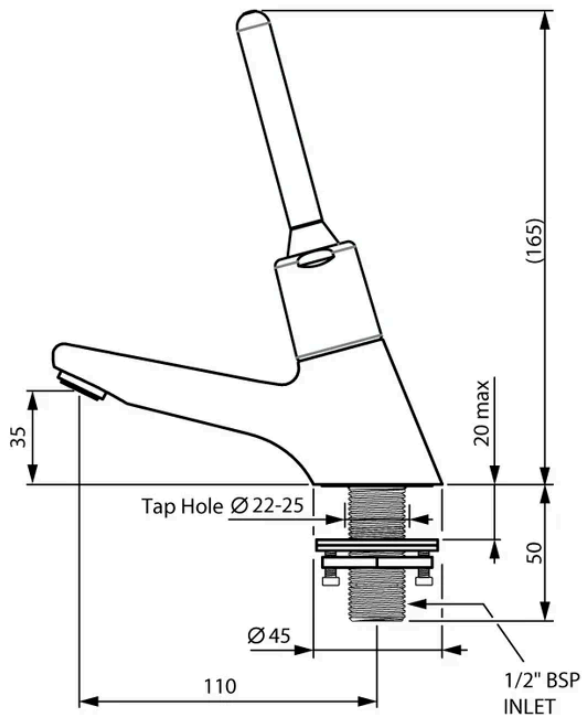

VISIT [BRITEX.COM.AU](https://www.britex.com.au) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 13 May 2026 | Rev 4