



TW-9110

Introducing the BRITEX Basin Mounted Sensor Tap, a solution designed to deliver exceptional hygiene, efficiency, and user convenience. This hands-free mixer tap combines precise hot and cold water control with reliable mains-powered operation.

Features and Benefits

- **Hands-Free Operation** - Enhances hygiene by eliminating the need for physical contact, reducing cross-contamination in high-use environments.
- **Adjustable Temperature Options**
 - Hot and cold mixing with optional single-temperature configuration.
- **Adjustable Hygienic Rinse Cycle** - Helps maintain water quality and compliance with health standards (12, 24, or 72 hours).
- **Easy Installation** - Reduces installation time and simplifies retrofitting.

Sample Spec

Britex Basin Mounted Sensor Tap Mixer Hot and Cold (Mains Powered) - Product Code: TW-9110


*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

Technical Information: Basin Mounted Sensor Tap - Mixer Hot and Cold

WELS: 6 Star Rating (5.5L/min)
Nominal Flow Rate (LPM): 5.5
WaterMark: AS 3718 Lic. WMKA20371
Operating Pressure: 30kPa - 1000kPa
Maximum Water Temperature: 80°C
Aerator: Economy Aerator, Cascade (self-cleaning)
Inlet Connections: 350mm long flexible hoses
Strainers: 0.5mm Mesh Size
Sensor-sensitivity: Automatic Self-adapting Sensor

Hygienic Rinse: Adjustable with touch from 30 sec - 20 min
Temporary-off: 2 minutes (fixed)
Continuous Water Flow: 2 minutes present (Adjustable with touch 30 sec - 20 min)
Power Supply: Mains Power
Engineering Standards: DIN EN 200; CE
Finish: Chrome

MODEL TW-9110 Front & Side Elevation

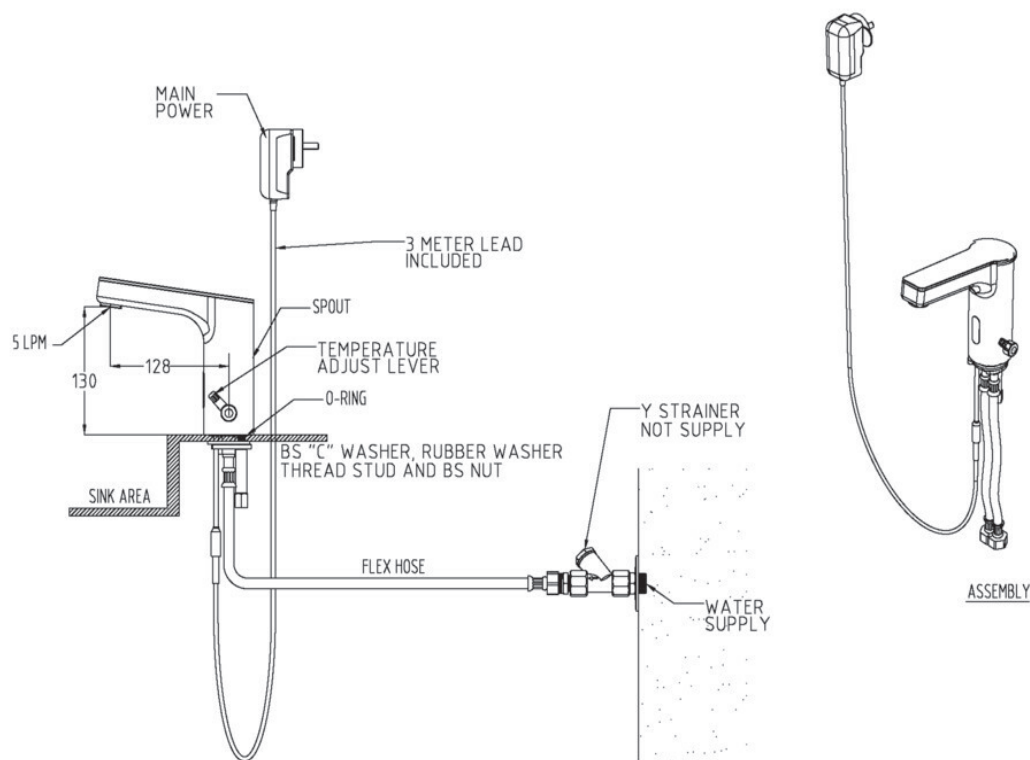

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 19 Mar 2026 | Rev 2