WALL MOUNTED SPOUT WITH INTEGRATED SENSOR

Lead Free

WaterMark
AS 3718
WM-021226

WATER RATING
5.0 litres per minute
Licence No. 0140



TW-IWS235

The BRITEX Wall Mounted Spout with Integrated Sensor is an advanced touchless tap designed to deliver superior hygiene and reliable performance in commercial, education and public environments. Featuring infra-red sensor activation and lead-free stainless steel construction, it provides a hands-free water dispensing solution suitable for hand washing over basins or bottle filling over sinks.

Features and Benefits

- **Touch-Free Sensor Operation –** Infra-red activation helps reduce contact and supports improved hygiene.
- **Flexible Power Options –** Available in mains-powered or battery-operated configurations to suit installation requirements.
- **Versatile Application –** Suitable for hand washing stations and bottle filling installations.
- **Water Efficient Performance –** WELS 6 Star rated with a 5.0L/min flow rate to help reduce water consumption.

Sample Spec

BRITEX Wall Mounted Spout with Integrated Sensor - Product Code: TW-IWS235

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306


britex.com.au | sales@britex.com.au | **A.B.N** 83 004 309 737

Technical Information: Wall Mounted Spout with Integrated Sensor

Inlet Connection: ½" BSP Flexi-Hose
Recommended Working Pressure: 50-500 kPa
Recommended Temperature: 5°C-50°C
Maximum Temperature: 50°C

Flow Rate: 4.97L/min (WELS 6 Star)
Protection Class: IP56
Power Supply: 6V DC (Battery) or 100-240V AC (Mains Powered)

MODEL TW-IWS235 Front and Side Views

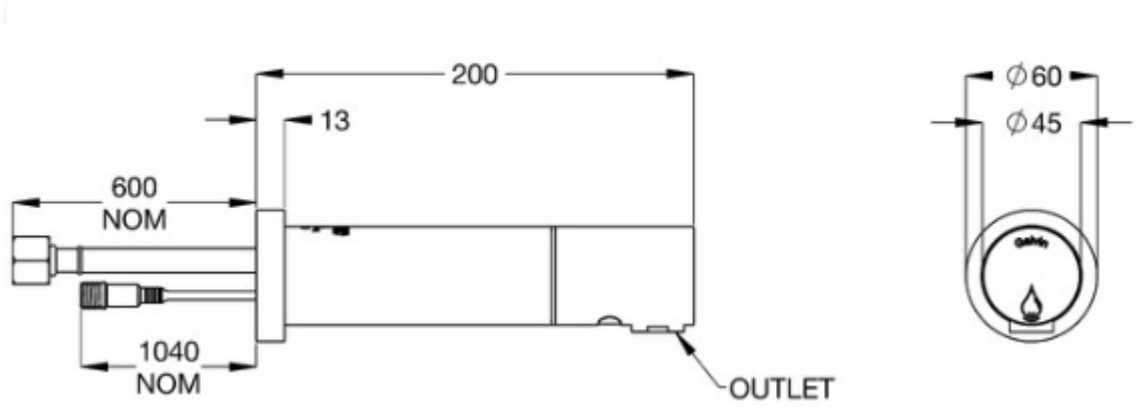

VISIT ***BRITEX.COM.AU*** TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 10 Nov 2026 | Rev 2

Due to ongoing research and our commitment to product development, details are subject to change without notice.
Details accurate at time of print.
Please refer to britex.com.au for the most current product information.
Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

britex.com.au | sales@britex.com.au | **A.B.N** 83 004 309 737