



Lead Free

AS3718  
WMKA1583

TW-LBSET-02

The BRITEX Lead Free Laboratory Taps are engineered to pair seamlessly with selected Britex stainless steel basins, sinks, and troughs. Designed for laboratories, testing facilities, and educational environments, they deliver reliable performance while meeting modern lead-free standards.

## Features and Benefits

- **Fixed or Swivel Spout** – Allows flexibility in installation and user preference. Swivel spouts improve reach and usability, while fixed spouts offer stability.
- **Anti-Rotation Pins** – Keeps the tap firmly aligned, reducing wear and extending service life.
- **Left or Right-Handed Operation** - Ensures ergonomic comfort and accessibility for different installation layouts and user needs.
- **Vandal-Resistant School Pattern Handle**
  - Designed for durability in high-use or public environments, reducing maintenance and replacement costs.

## Sample Spec

*Britex Laboratory Tap Set 2- Product Code: TW-LBSET-02*


\*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

## Technical Information: Laboratory Tap Set 2

**WELS:** 6 Star Rating (3.5L/min) / 5 Star Rating (6L/min)  
**Nominal Flow Rate (LPM):** 6  
**Watermark:** AS 3718 Lic. WMKA 1583  
**WELS Notes:** Supplied with Aerator x1, Tube Nozzle x1  
**Inlet:** 1/2" BSP (15mm)  
**Outlet:** Tube Nozzle

**Headwork:** Jumper Valve  
**Max Jumper Valve Working Temperature (°C):** 95  
**Max Static Pressure (kPa):** 1200  
**Max Recommended Pressure (kPa):** 500  
**Construction:** Lead Free Brass  
**Finish:** Chrome

MODEL TW-LBSET-02 Front & Side Elevation

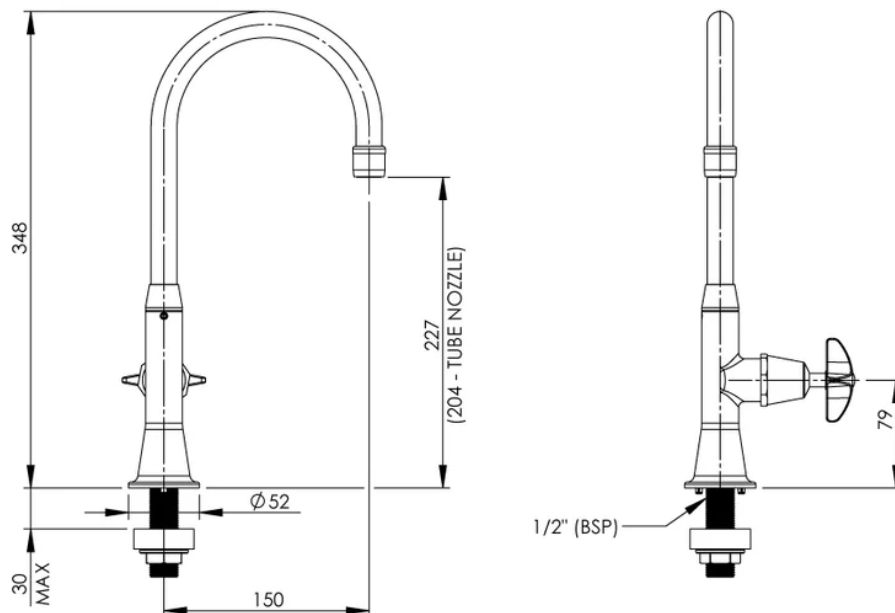

VISIT [BRITEX.COM.AU](http://BRITEX.COM.AU) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 31 Mar 2026 | Rev 2