


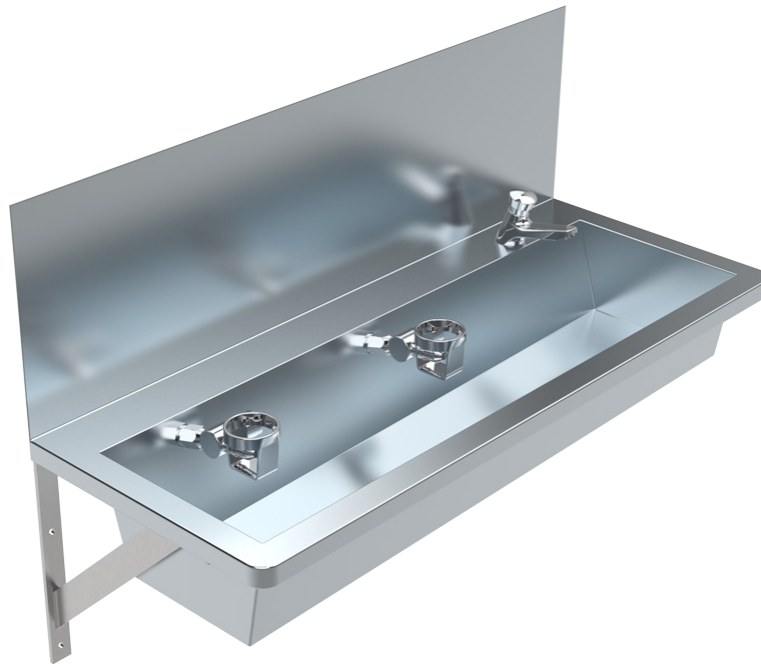

TWAL

Most common configuration illustrated

The BRITEX Stainless Steel Wallsend Trough is purpose-built for schools. This trough meets education standards with features like a rear hob for hand wash taps, angled rear for drinking taps, extended splashback, and rounded corners for safety.

Features and Benefits

- **Tapware Options** – Supplied with or without hand wash taps and drinking bubblers.
- **Flexible Sizing** – Available in standard or custom lengths to suit different spaces.
- **Ready to Install** – Includes 50mm waste outlet and wall brackets.
- **Plumbing Made Easy** – SConcealed tapware connections for a clean finish.
- **Configurable Waste Position** – Choose left or right-hand waste placement.
- **Perfect for Schools** – Designed specifically for education sector projects.

Sample Spec

BRITEX 1.2mm grade 304 S.S. Wallsend Wall Mounted Trough with 300mm Splashback - 1500L x 390W x 150D. Complete with radius front corners, 80mm rear tap landing complete with wall brackets and right hand 50mm waste outlet - Product Code TWAL-1500-WB-R

BRITEX 1.2mm grade 304 S.S. Pre-Plumbed Wallsend Wall Mounted Trough with 300mm Splashback - 1500L x 390W x 150D. Complete with 3 No. Cam Action Drinking Taps on 80mm rear tap landing, radius front corners, complete with wall brackets and right hand 50mm waste outlet - Product Code TWALP-1500-3-TW-DC45-WB-R

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: Wallsend Trough

Sample Specification Code

TWALP - 1500 - 3 - TW-DC45 - WB - R

= Wallsend Trough 1500mm long with 3 Push Button Bubblers, Brackets only and Right Hand Waste

Specification Key

A = Product Code
TWALP: Pre-plumbed
TWAL: Trough only

B = Trough Length (mm)

If Pre-plumbed

C = Tap Quantity

If Pre-plumbed

D = Tap Code

E = Support Options

WB: Brackets Only

BL: Brackets and Legs

F = Waste Outlet Position

L: Left

R: Right

Suggested Mounting Heights (mm)

	infant	primary	secondary
wash	550	650	700
drink	550	700	900

Tapware Options



Push Button
TW-DP45



Cam Action
TW-DC45




Pillar Tap
TW-9102




Laboratory Tap Set 12
TW-LBSET-12

Taps installed 200mm in from each end and @ 400mm spacings


MODEL TWAL Front Elevation

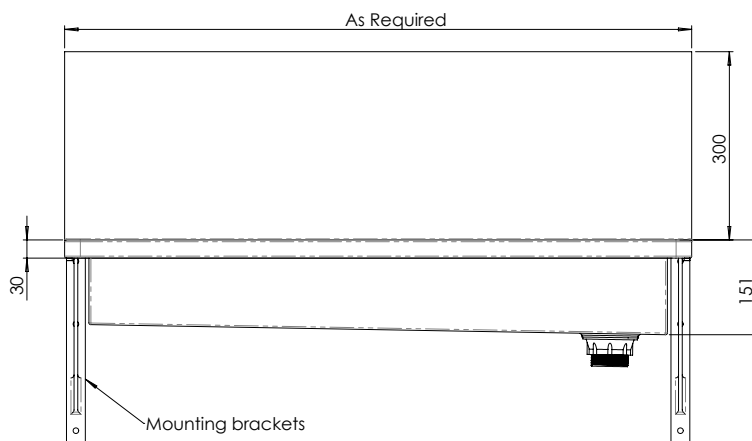

MODEL TWAL Section

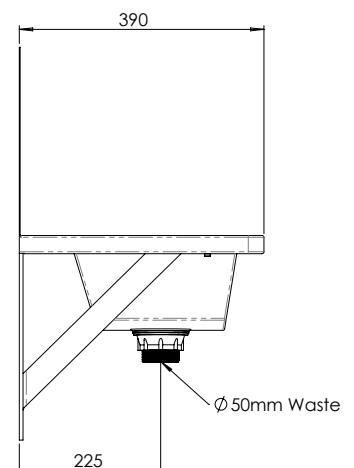

MODEL TWAL Plan

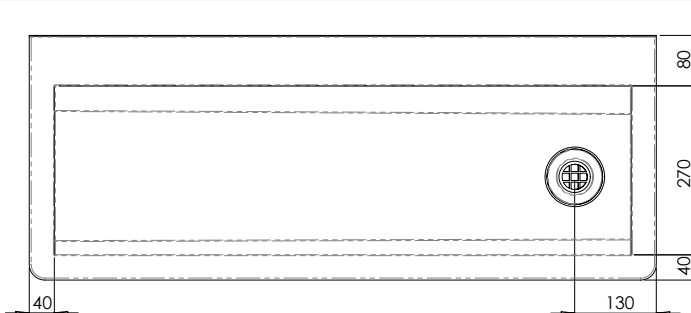

Add ons

- Tap holes

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 10 Sep 2024 | Rev 2