



USUP

Most common configuration illustrated

The BRITEX Esiflow Urinal features seamless construction with reinforced backing on larger models for added strength, and its efficient weir-style flush minimises water use. Ideal for early education facilities, designed for younger users with enhanced safety and hygiene features.

Features and Benefits

- **Extra Wide Hinged Grated Step** - Improves access and simplifies cleaning in high-use environments.
- **Sensor Flush Compatibility** - Integrates seamlessly with BRITEX sensor-activated flushing systems.
- **Recessed or Floor Mounted Installation** - Flexible mounting options to suit different building layouts.
- **Vandal-resistant construction** - Robust stainless steel design built for demanding public environments.
- **Hygienic No Drip Step Area** - Reduces splash and improves cleanliness in shared facilities.
- **Custom Manufactured Lengths** - Tailored sizing to meet specific architectural and site requirements.

Sample Spec

Britex Stainless Steel Superstep Urinal. **1800mm** long. WELS and WaterMark certified. **Recessed** model. **Rear** water entry. Supplied with a **FSM1** Smart Flush solenoid & sensor box. **100mm** outlet size and **Left** waste outlet. Product Code - **USUP-1800-RE-R-FSM1-100-L**

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: Superstep Urinal

Sample Specification Code

A	B	C	D	E	F	G	
USUP	1800	RE	R	FSM1	100	L	= Superstep Urinal 1800mm long, Recessed with Rear Entry paired with FSM1 flushing, 100 outlet size and Right Hand Waste

Specification Key

A = Product Code

B = Urinal Length (mm)

C = Mounting

RE: Recessed

FM: Floor Mounted

C = Entry Point

T: Top Entry

R: Rear Entry

D = Flushing Options

(Rear entry only)

FSM1 (1800mm max urinal length)

FSM2 (1801mm+ urinal length)

E = Outlet Size

100

Custom


F = Waste Outlet Position

L: Left


R: Right

C: Custom


MODEL USUP Front Elevation

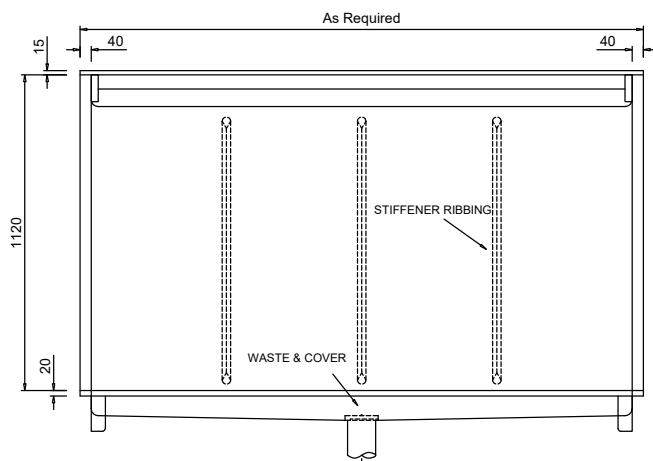

MODEL USUP Plan

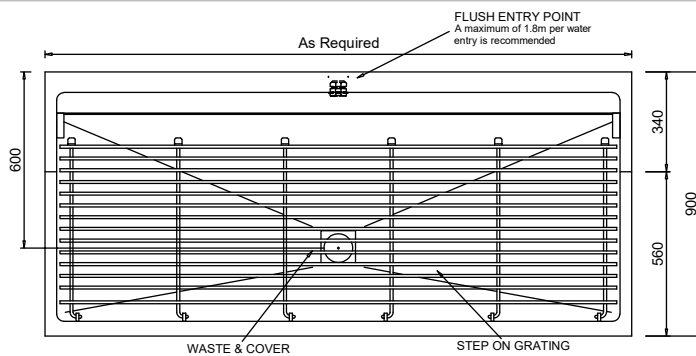

MODEL USUP Section

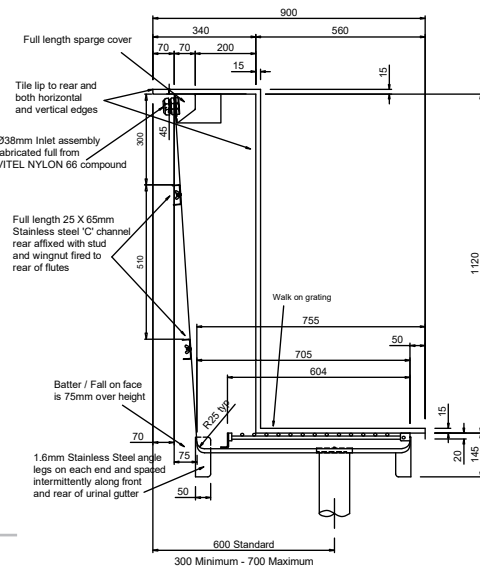

TYPICAL SECTION
(Rear entry shown)

Recessed Model Shown
Floor Mounted Model
Includes Front Panel

Add ons

- 'L' and 'U' shaped configuration
- Smart SaniFlush Sensor System
- Free standing ends (if not between walls)
- Butt joint for modular lengths

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 21 Sep 2026 | Rev 6