

ADJUSTABLE HEIGHT HAND HELD SHOWER SET WITH GRAB RAIL



WELS REG # S05051(V)



features and benefits

- Chrome plated shower head with single spray pattern
- Single hand, adjustable shower head holder
- Bright No 3 polished stainless steel heavy duty grab rail 900mm long
- 1.5m long smooth hose in chrome finish
- Chrome plated wall connection
- AS1428.1-2009/2010 compliant

about

Chrome Hand Held Shower and Smooth Hose with 900mm Stainless Steel Grab Rail. Recommended to be paired with Britex TW-MIX-21 Chrome Plated Single Lever Mixer Hot/Cold

sample spec. text

Britex Adjustable Height Hand Held Shower Set with Grab Rail - Product Code: BTR-01-062

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE
Britex Place, Mirra Crt
Bundoora VIC 3083
t (03) 9466 9000
f (03) 9466 9044

SYDNEY
16 Northumberland Drv
Taren Point NSW 2229
t (02) 9531 2100
f (02) 9531 2800

PERTH
Unit 1/8 Principal Link
Malaga WA 6090
t (08) 9249 5464
f (08) 9248 6893

BRISBANE
19 Manilla St
East Brisbane QLD 4169
t (07) 3363 2400
f (07) 3363 2444

ADELAIDE
The Britex Group
SA State Office
t 1300 764 744
f 1300 784 306

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

ADJUSTABLE HEIGHT HAND HELD SHOWER SET WITH GRAB RAIL

PRODUCT CODE

BTR-01-062



technical
information


WELS: 3 Star Rating (8.5L/min)

Inlet Connection: 1/2" BSP (15mm)

Working Pressure Range: 150 - 500 kPa

Flow Rate: 8.5 l/m

Maximum Water Temperature: 70°C

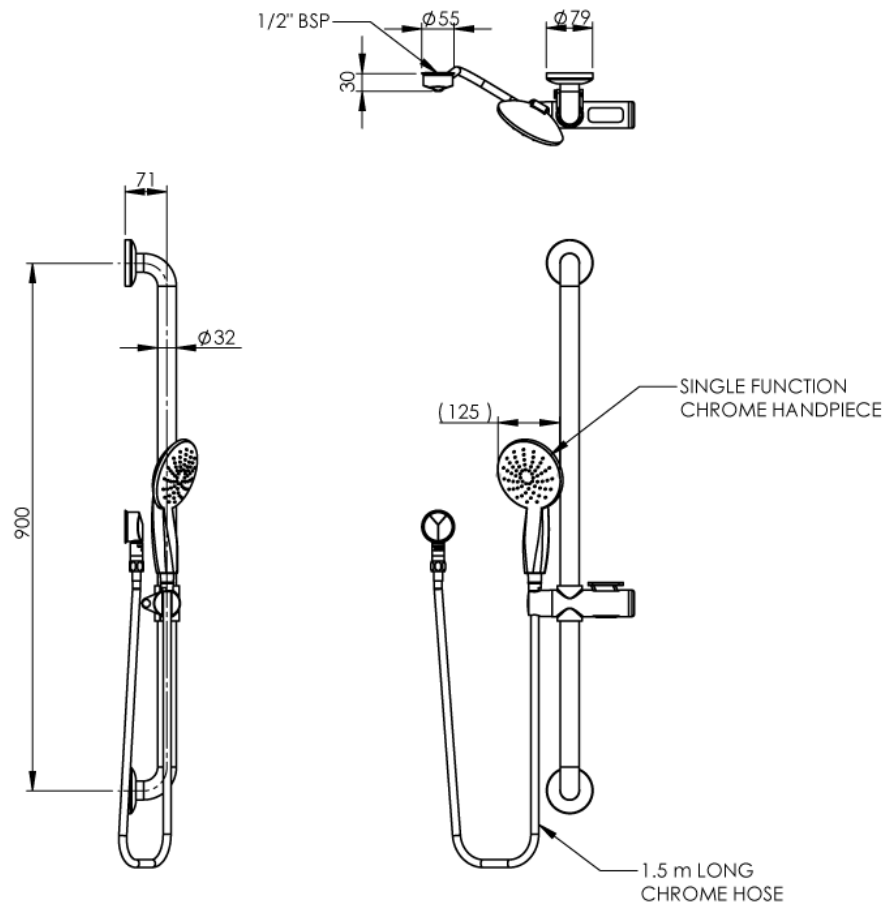

specifying
guide

When specifying this product please include:

- Product Name and Code

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised Dec 2023



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

britex.com.au | sales@britex.com.au | A.B.N 83 004 309 737

