



TLW

Most common configuration illustrated

The BRITEX Stainless Steel Lockable Wallsend Trough incorporates a lockable stainless steel lid that protects tapware from vandalism when not being used outside school hours. Rounded front corners provide added safety. Available in custom lengths, it can be supplied pre-plumbed with WaterMark and WELS certified hand wash taps and drinking bubblers conforming to NSW department of education standards.

Features and Benefits

- Lockable lid to protect tapware
- Conforms to NSW DOC education standards
- Available pre-plumbed with NSW DOC approved hand wash/drinking taps
- Radius external corners - added safety
- Concealed tapware connections
- Standard and custom lengths
- Left or right hand waste position
- 50mm waste supplied
- Ideal for education projects

Sample Spec

BRITEX 1.2mm grade 304 S.S. Lockable Wallsend Wall Mounted Trough with 300mm Splashback- **2000L** x 390W x 150D. Complete with lockable lid, radius front corners, complete with **wall brackets** and **left** hand 50mm waste outlet - Product Code TLW-2000-WB-L

BRITEX 1.2mm grade 304 S.S. Pre-Plumbed Lockable Wallsend Wall Mounted Trough - **2000L** x 390W x 150D. Complete with **4 No. Cam Action Drinking Taps**, radius front corners, complete with **wall brackets** and **right** hand 50mm waste outlet - Product Code TLWP-2000-4-TW-DC45-WB-R

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: Lockable Wallsend Trough

Sample Specification Code

A **B** **C** **D** **E** **F**
TLWP - 2000 - 4 - TW-DC45 - WB - R

= Lockable Wallsend Trough 2000mm long with 4 Cam Action Bubblers, Brackets only and Right Hand Waste

Specification Key

A = Product Code

TLWP: Pre-plumbed

TLW: Trough only

B = Trough Length (mm)

Pre-plumbed only

C = Tap Quantity

Pre-plumbed only

D = Tap Code

E = Support Options

WB: Brackets Only

BL: Brackets and Legs

F = Waste Outlet Position

L: Left

R: Right

Suggested Mounting Heights (mm)

	infant	primary	secondary
wash	550	650	700
drink	550	700	900

Tapware Options



Push Button
TW-DP45



Cam Action
TW-DC45




Pillar Tap
TW-9102




Cam Action
TW-0020

Taps installed 200mm in from each end and @ 400mm spacings


MODEL TLW Front Elevation

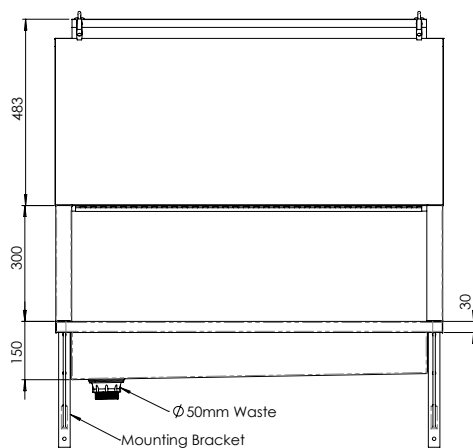

MODEL TLW Side View

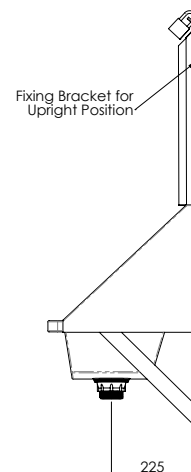

MODEL TLW Plan

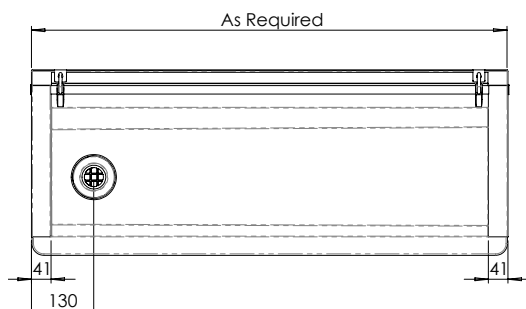

Add ons

- Tap holes

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 18 Sep 2024 | B