



TPWDPD

Most common configuration illustrated

The BRITEX Stainless Steel PWD Pre-Plumbed Drinking Trough is a robust, low maintenance hydration solution designed for safety and efficiency in public and high-traffic spaces.

Features and Benefits

- **50mm Waste & Wall Brackets Supplied** – Just connect to services and it's ready to use, saving time and labour costs.
- **Multiple bubbler activation options** – Offers user-friendly flexibility to suit different age groups and accessibility needs.
- **Rubber mouthguards** - Enhances user safety by cushioning accidental impacts.
- **WELS and WaterMark certified** - Ensure hygienic, efficient performance in outdoor and high-use environments.
- **Concealed plumbing with left or right waste options** - Tamper resistant design with flexible waste outlet positioning supports vandal resistance and versatility in installation.

Sample Spec

BRITEX 1.2mm grade 304 S.S. PWD Pre-plumbed Drinking Wall Mounted Trough with 150mm Rear Boxed Upstand, internal & external radius corners - 1800mm Long Plumbed with 4 No. Push Button activated drinking taps with safety rubber mouthpieces, complete with Wall Brackets and 50mm Right waste outlet. - Product Code TPWDPD-1800-4-TW-DP90-WB-R

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: PWD Drinking Trough

Sample Specification Code

A **B** **C** **D** **E** **F**
TPWDPD - 1800 - 4 - TW-DP90 - WB - R

= PWD Pre-Plumbed Drinking Trough 1800mm long with 4 Push Button Bubblers, Brackets only and Right Hand Waste

Specification Key

A = Product Code	E = Support Options
B = Trough Length (mm)	WB : Brackets Only
C = Tap Quantity	BL : Brackets and Legs
D = Tap Code	F = Waste Outlet Position
	L : Left
	R : Right

Tapware Options



Cam Action
TW-DC90



Push Button
TW-DP90



Lever Action
TW-DL90




Bottle Filler
TW-BF-L90


Suggested Mounting Heights (mm)

infant	primary	secondary
550	700	900


MODEL TPWDPD Front Elevation

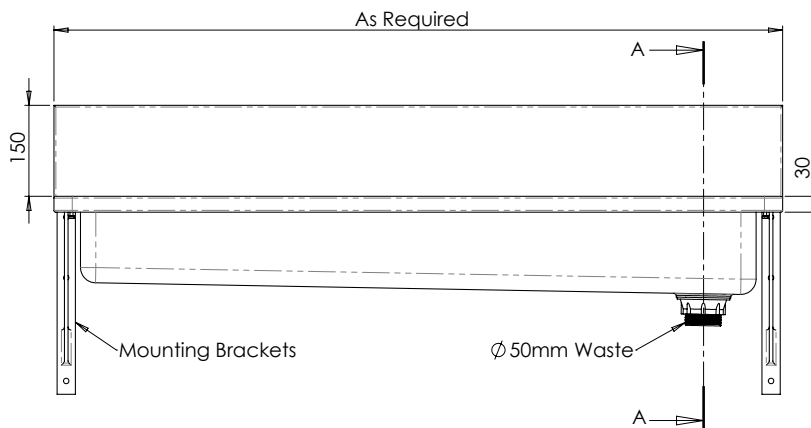

MODEL TPWDPD Section

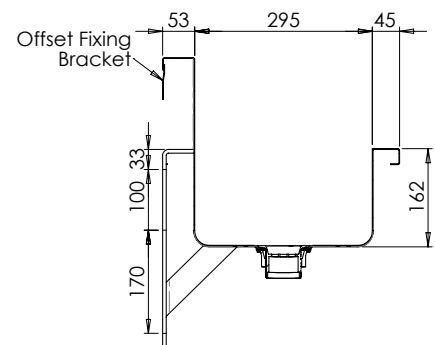

MODEL TPWDPD Plan

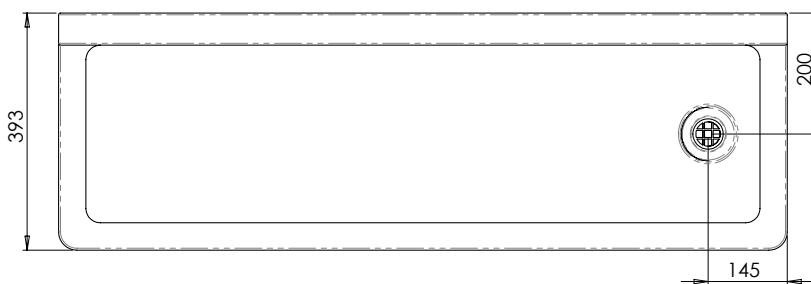

Add ons

- SS Shroud 450mm (consult with Britex)
- Freestanding Support Frame

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 23 June 2025 | B