



TPWDPH

Most common configuration illustrated

The BRITEX Stainless Steel PWD Pre-Plumbed Hand Wash Trough comes complete with a choice of WELS and Watermark-certified, lead-free hand wash tapware installed. Plumbed with four timed flow taps featuring push button activation, each tap is set to run for only 6 seconds per activation to prevent water wastage and reduce the risk of vandalism. Fully welded with rounded corners, both internally and externally, the trough ensures easy cleaning and added safety in high-traffic areas. A 50mm hob in the rear splashback conceals the pre-installed plumbing and offers extra protection against vandalism. Supplied complete with a 50mm waste outlet and heavy-duty wall brackets for secure installation.

Features and Benefits

- Supplied pre-plumbed.
Just connect water and waste outlet
- Choice of push button or lever-activated bib taps
- Vandal resistant timed flow taps (6 secs)
- 50mm waste & wall brackets supplied
- Concealed tapware connections
- Left or right hand waste position
- Radius internal corners - easy cleaning
- Radius external corners - added safety
- WELS and Watermark certified tapware
- Ideal for schools, kindergartens and childcare

Sample Spec

BRITEX 1.2mm grade 304 S.S. PWD Pre-Plumbed Hand Wash Wall Mounted Trough with 150mm Rear Boxed Upright internal & external radius corners - 1800mm Long. Plumbed with 4 No Timed Flow Taps with Push Button Activation complete with wall brackets and 50mm left waste outlet. - Product Code TPWDPH-1800-4-TW-0007-WB-L

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: PWD Hand Wash Trough

Sample Specification Code

A **B** **C** **D** **E** **F**
TPWDPH - 1800 - 4 - TW-0007 - WB - L

= PWD Pre-Plumbed Hand Wash Trough 1800mm Long with 4 Push Button Bubblers, Brackets Only and Left Hand Waste

Specification Key

A = Product Code **E** = Support Options
B = Trough Length (mm) **WB**: Brackets Only
C = Tap Quantity **BL**: Brackets and Legs
D = Tap Code **F** = Waste Outlet Position
L: Left
R: Right

Tapware Options



Push Button
TW-0007



Lever Action
TW-0048



Push Button
TW-9104



Lever Action
TW-9106


Suggested Mounting Heights (mm)

infant
550


primary
650

secondary
700


MODEL TPWDPH Front Elevation

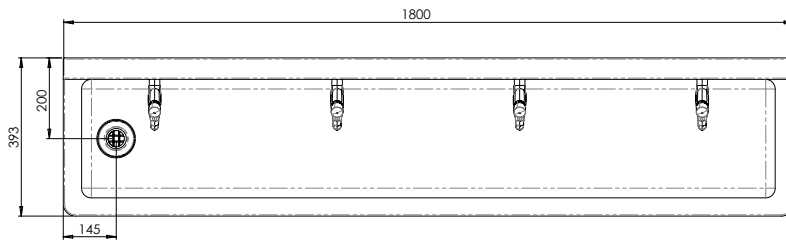

MODEL TPWDPH Section

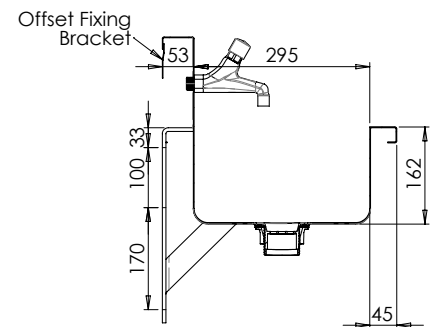

MODEL TPWDPH Plan

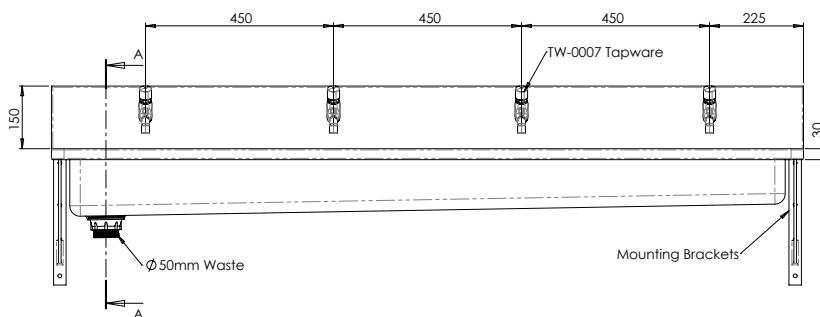

Common Trough Length & Tap Combinations

1200mm	3 Taps
1500mm	3 Taps
1800mm	4 Taps
2400mm	6 Taps

Add ons

- SS Shroud 450mm (consult with Britex)
- Freestanding Support Frame

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 11 March 2025 | A