



Lead Free
AS3718
WM 020302



Lead Free



TW-9101

The BRITEX Hob Mounted Eco Timed Flow Tap – Cold is a durable, water-saving tap designed for BRITEX stainless steel troughs, sinks and basins. Manufactured from robust DR brass, it features a self-cleaning mechanism to extend service life and withstand heavy use in public amenities.

Features and Benefits

- **Push-Button Timed Flow** – Simple activation with a consistent 7-second flow and hygienic auto shut-off to minimise water wastage.
- **Self-Cleaning Mechanism** - Reduces internal build-up and maintenance, prolonging tap life.
- **Vandal Resistant Design** – Engineered to withstand tampering and damage in high-use public environments.
- **Chrome Plated Finish** - Heavy-duty, durable, easy to clean surface and maintains a polished appearance.

Sample Spec

Britex Hob Mounted Eco Timed Flow Tap - Cold - Product Code: TW-9101


*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

Technical Information: Hob Mounted Eco Timed Flow Tap - Cold

WELS: 6 Star Rating (4.5L/min)
Nominal Flow Rate (LPM): 4.5
WaterMark: AS 3718 Lic. WM 020302
Inlet: 1/2" BSP (15mm) MI
Outlet: Flow Straightener
Valve Type: Time Flow

Max. Recommended Temperature (°C): 45
Max. Working Temperature (°C): 70
Max. Static Pressure (kPa): 1000
Max. Recommended Pressure (kPa): 250 Min - 300 Max
Finish: Chrome

MODEL TW-9101 Side Elevation

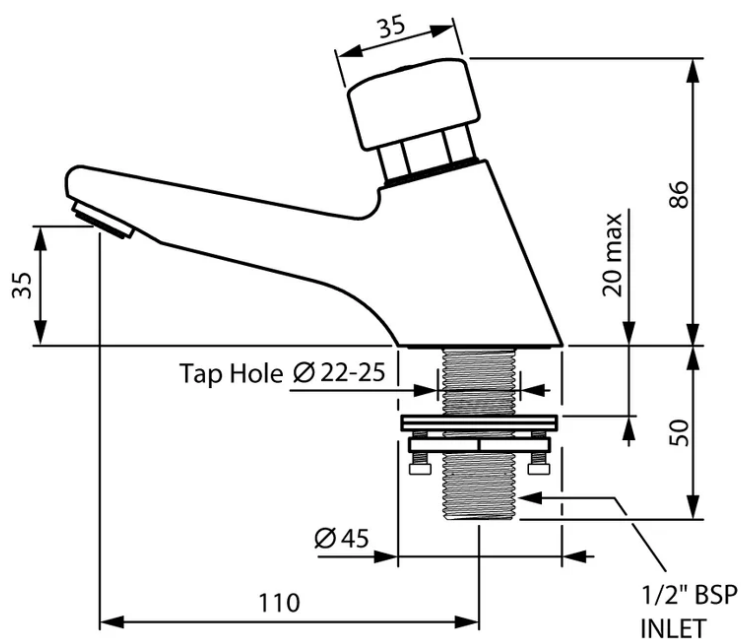

VISIT [BRITEX.COM.AU](https://www.britex.com.au) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 13 May 2026 | Rev 4