



Lead Free

AS 3718
WMKA0034

Lead Free



TW-LBSET-04

The BRITEX Laboratory Tap Set 4 delivers safe, durable and clean water control for modern laboratory environments. Designed to integrate seamlessly with BRITEX stainless steel fixtures, it features robust construction suited to education, and research facilities, meeting the highest standards for laboratory equipment.

Features and Benefits

- **Laboratory Grade Quality** - Strong, reliable build with a tough, vandal resistant handle and a unique locking system.
- **Choice of Outlet Types** - Interchangeable XT tube nozzles, aerators, and fixed or swivel spouts to suit varied lab applications.
- **Heavy-duty Chrome Plated Finish** - Durable, corrosion-resistant and easy to clean for hygiene-critical spaces.
- **Australian Made** - Local manufacturing ensures readily available spare parts and support, reducing maintenance time and costs.

Sample Spec

Britex Laboratory Set 4 Type 13 - Jumper Valve, Swivel Outlet with Tube Nozzle, Hot and Cold Mixing Unit - Product Code: TW-LBSET-04


*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

Technical Information: Laboratory Tap Set 4

WELS: 6 Star Rating (4.5L/min) or 5 Star Rating (6.0L/min)
Nominal Flow Rate (LPM): 4.36 or 5.6
WaterMark: AS 3718 Lic. WMKA0034
Inlet: 1/2" BSP - Male
Outlet: Tube Nozzle

Headwork: Jumper Valve
Working Pressure Range (kPa): 50 Min - 500 Max
Maximum Working Temperature (°C): 5 Min - 65 Max
Construction: Lead Free Brass
Finish: Chrome

MODEL TW-LBSET-04 Front & Side Elevation

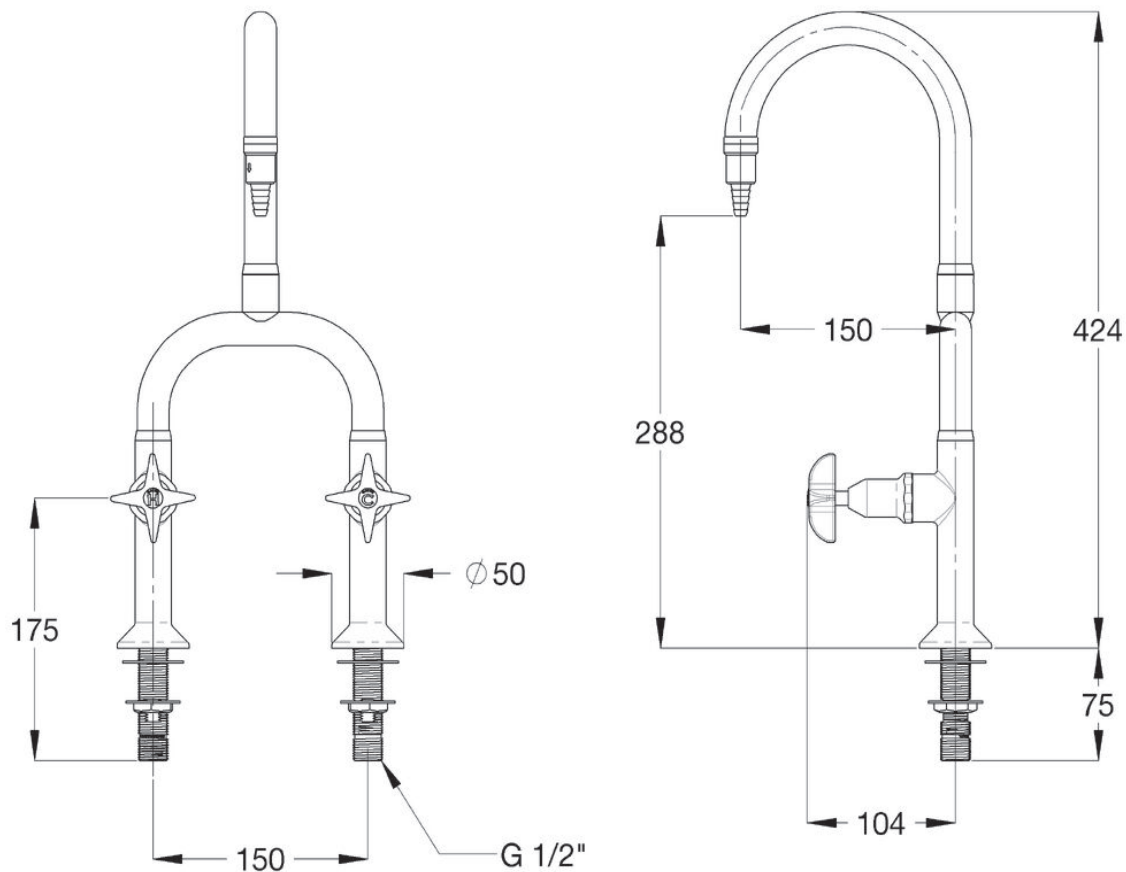

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 17 Mar 2026 | Rev 2