




Lead Free
AS 3718
WMKA02260



TW-MIX-L

The BRITEX Hob Mounted Mixer Tap – Lever Action is designed to complement BRITEX stainless steel basins and sinks, delivering commercial-grade performance with a heavy-duty chrome-plated finish. Ideal for public amenities, education projects, hospitals and high-use accessible washrooms, it includes a 165mm bright chrome lever for compliant operation.

Features and Benefits

- **Anti-Scald Stop Ring** – Adjustable safety feature to help limit maximum hot water temperature.
- **165mm Accessible Lever** – Extended handle for easier activation in accessible and high-use environments.
- **AS 1428.1 Compliant** – Meets accessibility requirements when installed in accordance with AS 1428.1 guidelines.
- **NSW Education Approved** – Compliant with NSW Education EFSG Guidelines, making it suitable for school projects.

Sample Spec

Britex Basin Mounted Lever Mixer - Product Code TW-MIX-L


*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

Technical Information: Hob Mounted Mixer Tap - Lever Action


WELS: 6 Star Rating (3.5L/min) or
5 Star Rating (6L/min)
Nominal Flow Rate (LPM): 3.22 or 5.77
WaterMark: AS 3718 Lic. WMKA02260
Inlet: G 1/2" - Female (Flexi-hoses)
Outlet: Laminar Flow Aerator

Headwork: Ceramic Cartridge
Working Pressure Range (kPa): 150 Min - 500 Max
Maximum Working Temperature (°C): 10 Min - 80 Max
Construction: Lead Free DZR Brass
Finish: Chrome

MODEL TW-MIX-L Side View

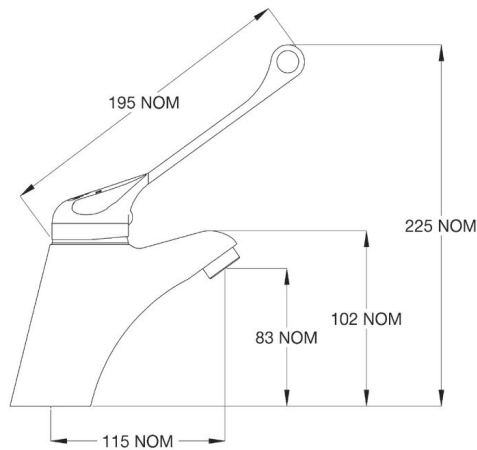

MODEL TW-MIX-L Plan View



MODEL TW-MIX-L Front View



VISIT [BRITEX.COM.AU](https://www.britex.com.au) TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 19 May 2026 | Rev 2