




Lead Free

AS 3718
WMKA0034

Lead Free

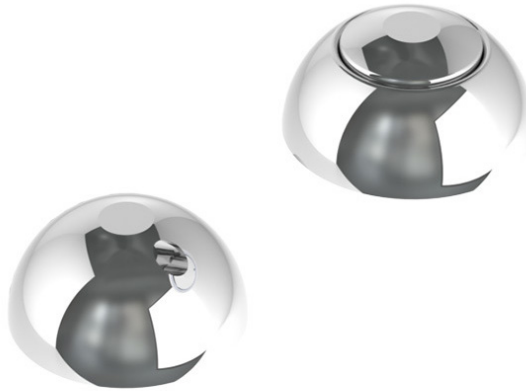

TW-SEC-01

The BRITEX Timed Flow Push Button Basin Set is designed for correctional facilities and other high-risk environments, combining ligature-resistant design with heavy-duty vandal resistance. Built from durable lead free DZR brass, it withstands heavy wear and supports safer use.

Features and Benefits

- **Concealed Time-flow Cartridge** – Water-efficient, 15-second operation with a high-flow bubbler for reliable, controlled water delivery.
- **Ligature Resistant Design** – Low-profile form and radius edges minimise leverage points to reduce self-harm risks.
- **Vandal Resistant Construction** – Heavy-duty lead-free DZR brass and secure fixings withstand impact, tampering and misuse.
- **Chrome-plated Finish** – High-quality chrome surface for easy cleaning and hygiene maintenance.

Sample Spec

Britex Timed Flow Push Button Set (Cold Only) - Product Code TW-SEC-01


*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

Technical Information: Timed Flow Push Button Basin Set (Cold Only)

WELS: 6 Star Rating (2.5L/min)
Nominal Flow Rate (LPM): 2.55
WaterMark: AS 3718 Lic. WMKA0034
Inlet: G 1/2" - Male
Outlet: Dome Outlet

Headwork: Timeflow Cartridge - 15 Sec +/- 5 Sec
Working Pressure Range (kPa): 100 Min - 500 Max
Maximum Working Temperature (°C): 5 Min - 65 Max
Construction: Lead Free DZR Brass
Finish: Chrome

MODEL TW-SEC-01 Side Elevation

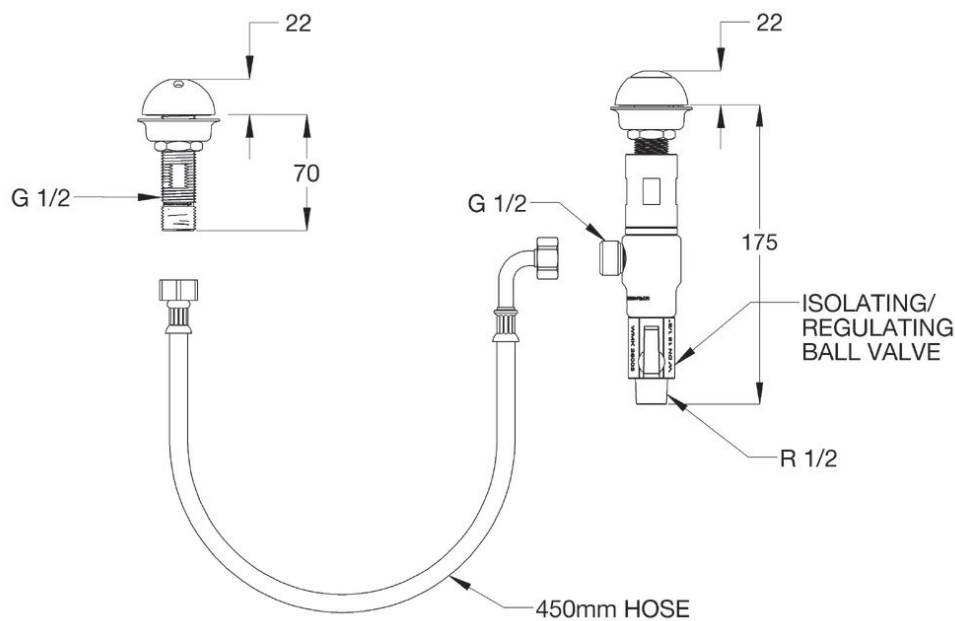

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 28 Jan 2026 | Rev 3