



TABL

Most common configuration illustrated

The BRITEX Stainless Steel Ablution Trough also known as the Pattern No. 5 trough is a versatile wash trough with rounded internal corners that prevent build up of grime and ensure cleaning is easy. A 50mm hob is provided in the splashback of the TABL-U so that plumbing can be concealed behind the trough without needing to make penetrations in the wall behind for Tapware. Made from 1.2mm type 304 stainless steel and possessing square external corners it is available in custom lengths with either left or right hand waste position.

Features and Benefits

- Available with or without upstand
- Standard and custom lengths
- Upstand model conceals tapware connections
- 50mm waste & wall brackets supplied
- Radius internal corners - easy cleaning
- Left or right hand waste position
- Ideal for schools, public amenities and pavilions

Sample Spec

BRITEX 1.2mm grade 304 S.S. Ablution Wall Mounted Trough with 20mm Tile Lip - **1200L** x 485W x 215D. Complete with **wall brackets** and **left** hand 50mm waste outlet - Product Code **TABL-1200-WB-L**

BRITEX 1.2mm grade 304 S.S. Ablution Wall Mounted Trough with Boxed 150mm Rear Upstand - **2400L** x 485W x 215D. Complete with **wall brackets** and **right** hand 50mm waste outlet. - Product Code **TABL-U-2400-WB-R**

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: Ablution Trough

Sample Specification Code

A **B** **C** **D**
TABL - 1200 - WB - L

= Ablution Trough 1200mm long with Brackets only and Left Hand Waste

Specification Key

A = Product Code

TABL: Tile Lip to Rear

TABL-U: Boxed Upstand to Rear

B = Trough Length (mm)

Maximum of 3000mm

Wall Mounted only

C = Support Options

WB: Brackets Only

BL: Brackets and Legs

D = Waste Outlet Position

L: Left

R: Right

Recommended Tapware (not Pre-plumbed)



Lever Tap
TW-0048



Lever Tap
TW-9106



Push Button
TW-9104




Push Button
TW-0007


Suggested Mounting Heights (mm)

	infant	primary	secondary
wash	550	650	700


MODEL TABL Front Elevation

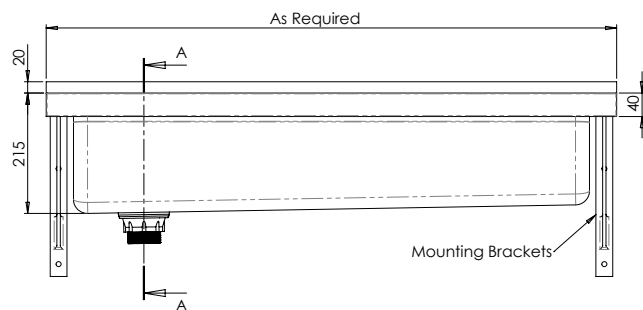


MODEL TABL Plan

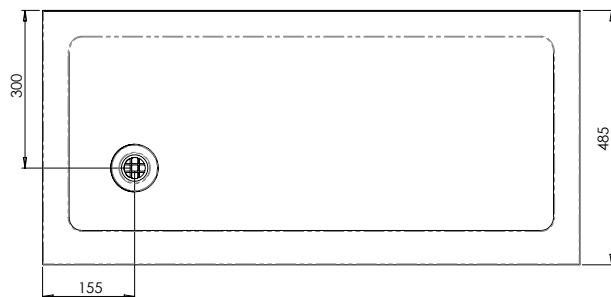


MODEL TABL Section

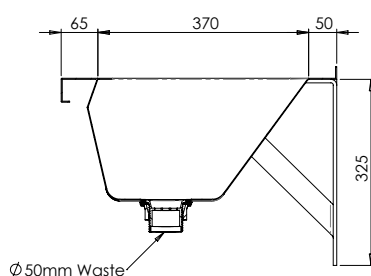


MODEL TABL-U Front Elevation

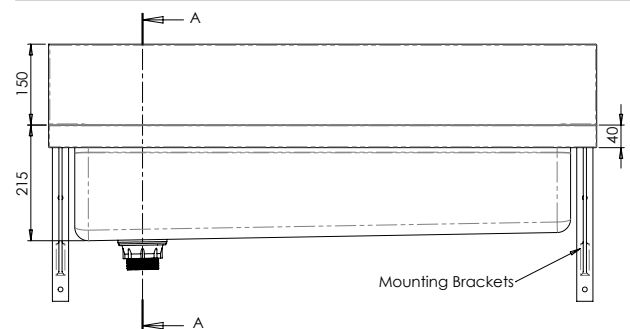

MODEL TABL-U Plan

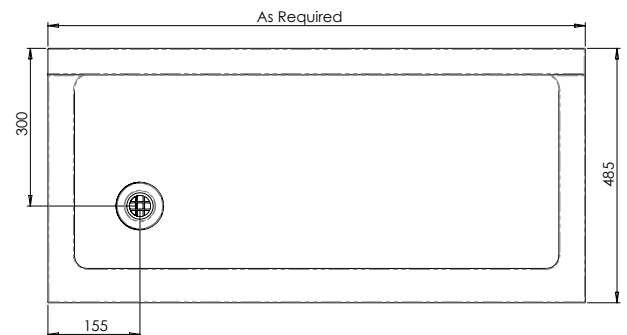

MODEL TABL-U Section

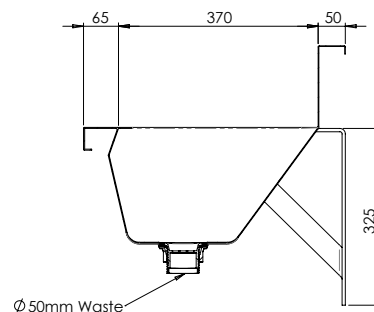

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 6 Sep 2024 | B