



TCA-D

Most common configuration illustrated

The BRITEX Stainless Steel Accessible Wall Mounted Clay & Ablution Trough is multipurpose in design and is commonly found in practical activity education classrooms such as Art / Tech rooms. This universal inclusive design includes Wheelchair accessibility and S.S. shroud to cover pipe work. One half of the trough is supplied with a raised (standing) waste, ensuring solid matter like clay, plaster and soil settle in the bottom of the trough, whilst clean water drains through the perforated top, thus preventing blockages. The other half of the trough is used for general purpose hand washing. Radius internal bowl corners allow for easy cleaning and a 50mm splashback hob conceals tapware connections. Available complete with tapware and compatible with the BRITEX Plaster and Clay Tank - OSPC

Features and Benefits

- Inclusive Design
- Standard and accessible access stations to comply with AS1428
- Universal / multi-purpose trough
- Suitable for art and technology rooms
- Separate bowls for solids and hand washing
- Raise waste (overflow) prevents solids going to general waste
- Stainless steel shroud under.
- Radius internal corners (easy cleaning)
- Optional Clay and Plaster arrestor
- Pre-plumbed with either cold only or hot & cold tapware

Sample Spec

BRITEX 1.2mm grade 304 S.S. Accessible Clay & Ablution Wall Mounted Trough with 280mm Boxed Upstand- 1830L x 410W x 150D. AS1428 Inclusive design with S.S. shroud. Complete with wall brackets and radius internal bowl corners. Left hand bowl to incorporate 100mm high perforated standing waste. *Pre-plumbed with lever operated hot and cold tapware* - Product Code TCA-D-PPCH

*RED TEXT may denote a **variable** where one option only is to be selected, a **nominal dimension** that needs to be specified, or an **optional feature** that can be removed if not required. Please refer to the back of this page for additional specification details and options.

HOW TO SPECIFY: Accessible Wall Mounted Clay & Ablution Trough

Sample Specification Code

A
TCA-D-PPCH

= Accessible Wall
Mounted Clay &
Ablution Trough with
Hot and Cold Taps

Specification Key

A = Product Code
TCA-D: Trough Only

TCA-D-PPC: TW-0048 (cold taps)
suggested for primary schools

TCA-D-PPCH: TW-0048 with
TW-SET-08 (hot and cold taps)
suggested for secondary schools

Tapware Options




Lever Activated
TW-0048




Lever Activated
TW-SET-08


MODEL TCA-D-PPCH Plan, Section and Front Elevation

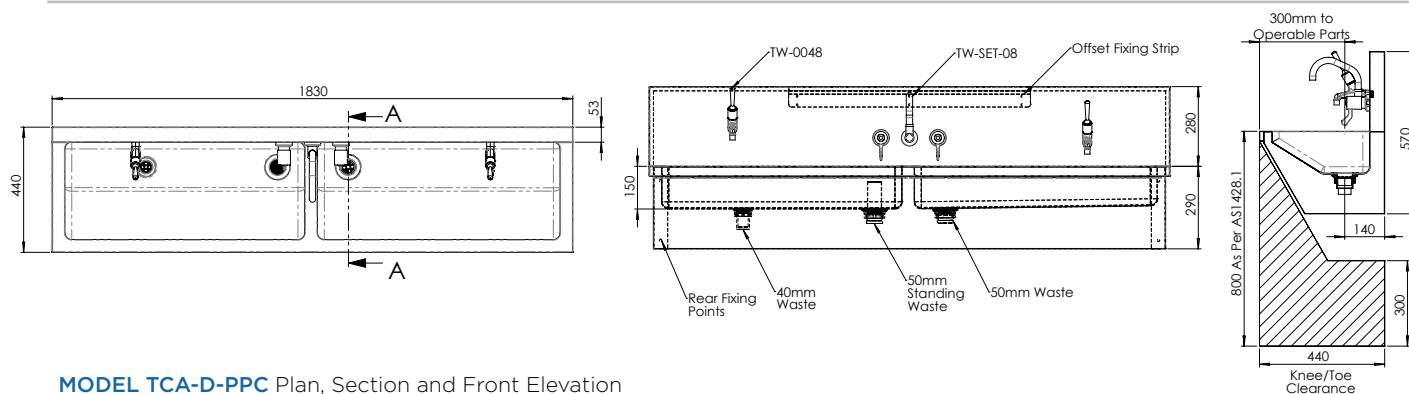

MODEL TCA-D-PPC Plan, Section and Front Elevation

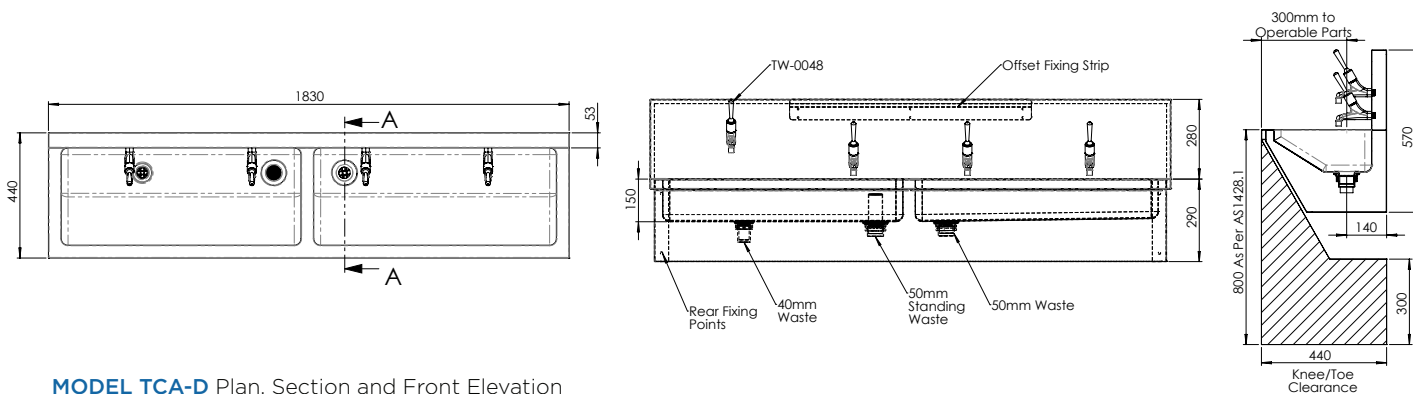

MODEL TCA-D Plan, Section and Front Elevation

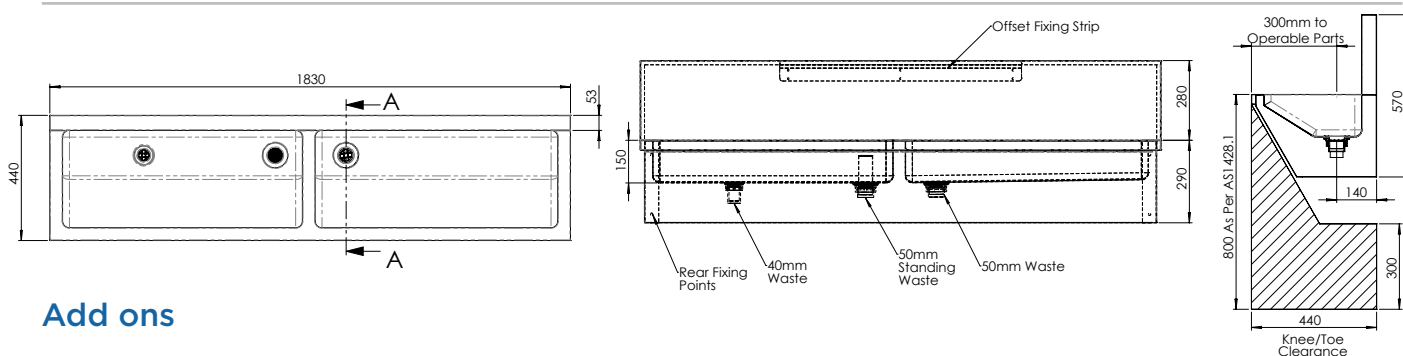

Add ons

- Custom tap hole configuration
- BRITEX Plaster & Clay Arrestor (Code: OSPC)

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.

Last Revised 8 Oct 2024 | A